

PS 254

Grid 2,54
Spring travel 10,00 mm

Technical Data

Minimum grid distance:	2,54 mm
Maximum spring travel:	10,00 mm
Recommended lifting height:	80%
Spring force at 4/5 spring travel:	0,8 N
E-value (collar height) defines the installation height	2 mm
Rated current:	2-3 A
Contact resistance:	30 mΩ
Pin housing:	Brass, gold-plated
Barrel:	Brass, gold-plated
Spring:	Steel, gold-plated
Piston:	Steel, or BeCu rhodium-plated, gold-plated or nickel-plated

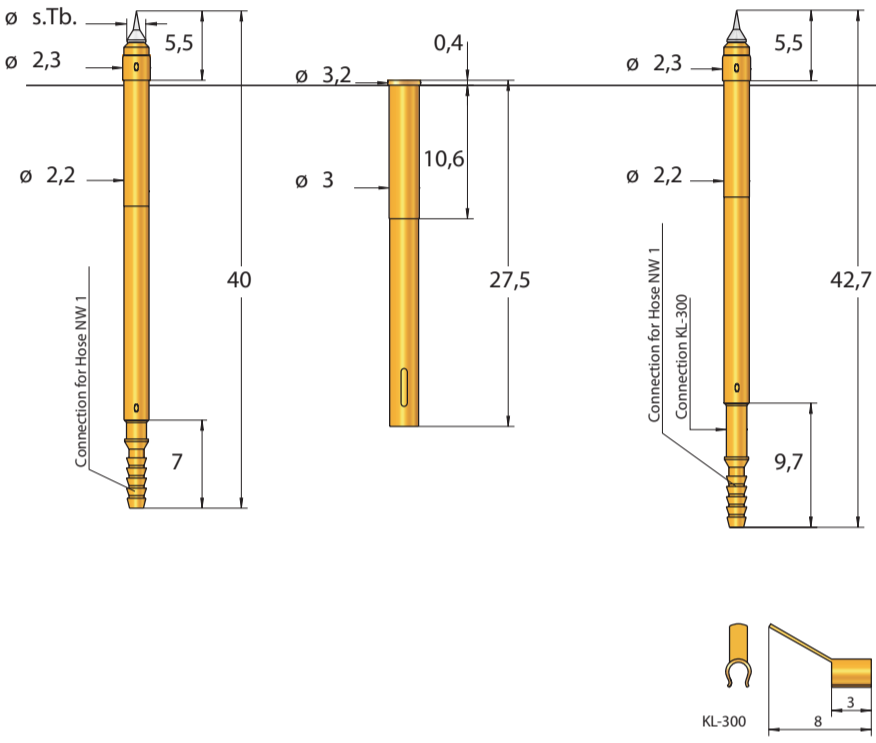


Figure	Type	∅(mm)	Electro- plating
	SR	1,50	R
	IK	2,00	R
	KR	1,30	R
	RD	1,00	A
	RI	2,50 2,00	A R
	DK	2,00	R
	LA	1,00	N

Alternative Head shapes are available.

Sample Order:

Series	Head Shape	∅ Head	Electroplating	Lifting Height	Spring Pin	Collar Height
FS 254	FL	20	A	50	15	10

