

SKS 254 Switching Probe

Grid 2,54
Spring travel 5,00 mm

Technical Data

Minimum grid distance:	2,54 mm
Maximum spring travel:	5,00 mm
Recommended lifting height:	80%
Spring force at 4/5 spring travel:	0,8 / 1,5 / 3,0 N
E-value (collar height) defines the installation height	2 mm
Rated current:	3 A
Contact resistance:	k.A.
Pin housing:	Brass, gold-plated
Barrel:	Brass, gold-plated
Spring:	Steel, gold-plated
Piston:	BeCu, gold- or nickel-plated (or gold-plated with Insulator Cap)

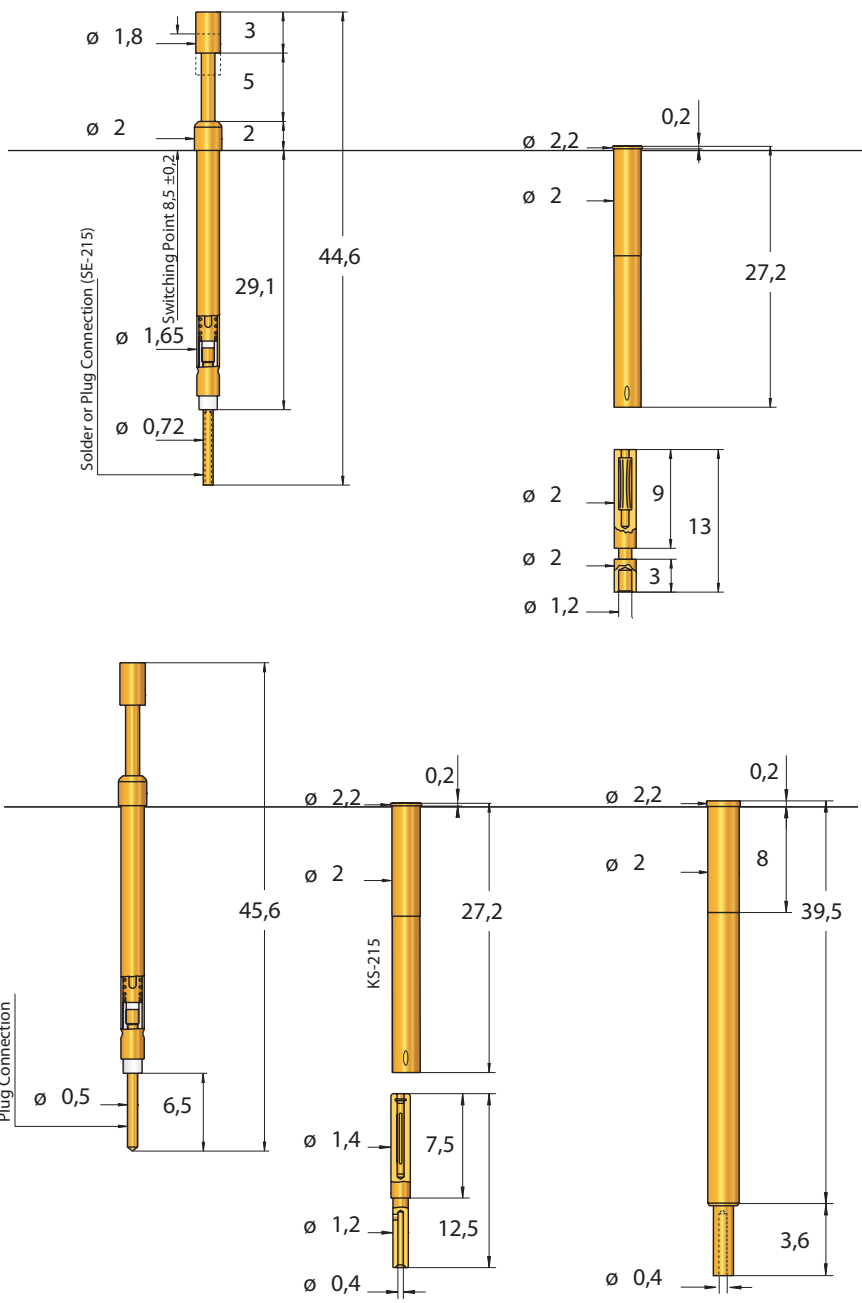


Figure	Type	ø(mm)	Electro- plating
	KU	1,30	A
	FL	1,80	A
	IK	1,80	A
	RD	1,00	A
	RI	1,80	N

Alternative Head shapes are available.

Sample Order:

Series	Head Shape	Ø Head	Electroplating	Lifting Height	Spring Pin	Collar Height
FS 254	FL	20	A	50	15	10

