


SKS 350 Switching Probe

Grid 3,50
Spring travel 5,20 mm

Technical Data

| | |
|---|---|
| Minimum grid distance: | 3,50 mm |
| Maximum spring travel: | 5,20 mm |
| Recommended lifting height: | 80% |
| Spring force at 4/5 spring travel: | 2,3 N |
| E-value (collar height) defines the installation height | 2 mm |
| Rated current: | 5 A |
| Contact resistance: | k.A. |
| Pin housing: | Brass, gold-plated |
| Barrel: | Brass, gold-plated |
| Spring: | Steel, gold-plated |
| Piston: | BeCu, gold- or nickel-plated (or gold-plated with Insulator Cap) |

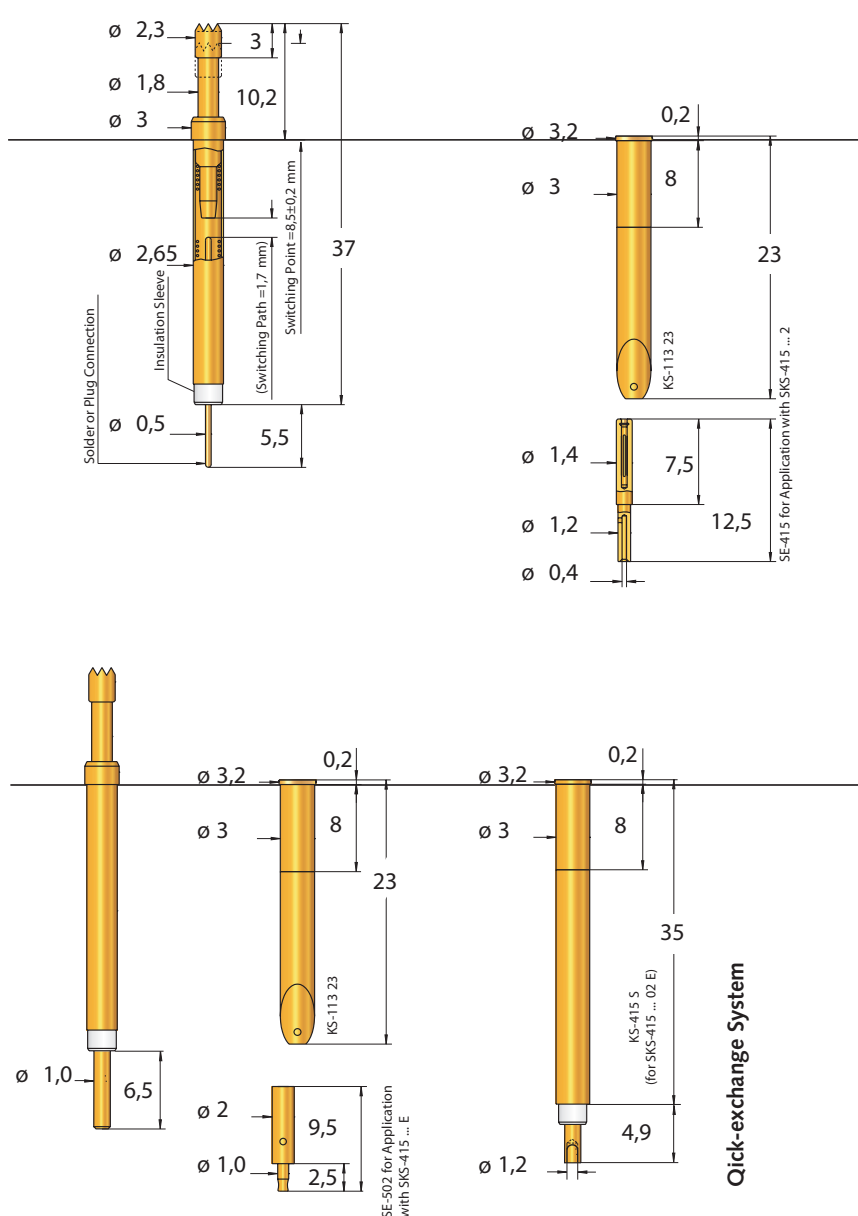

| Figure | Type | Ø(mm) | Electro- plating |
|--------|------|----------------------|------------------|
| | KU | 3,00 5,00 2,30 | A A A |
| | FL | 3,00 | A |
| | IK | 2,30 | A |
| | RI | 1,00 2,30 4,00 | A A A |

Alternative Head shapes are available.

Sample Order:

| Series | Head Shape | Ø Head | Electroplating | Lifting Height | Spring Pin | Collar Height |
|--------|------------|--------|----------------|----------------|------------|---------------|
| FS 254 | FL | 20 | A | 50 | 15 | 10 |

